

MPVW-UNIPPV2U Unistrut Video Wall Mount

For Video Wall Displays up to 1000 x 400 VESA

Best in Class Unistrut Video Wall Mount

- 6 points of micro-adjustment
- 3" Depth adjustment and 1" Plumb adjustment
- 1" Vertical adjustment and leveling
- 11.25" Service mode extension from wall for wiring & alignment
- Push in - Pop out™ technology
- Wall brake system for alignment on uneven walls
- One-touch lock and release mechanism



* Display size is meant as a guide – Compatible display sizes can be larger or smaller depending on the VESA and weight of the display.

| Model | Display Size* | VESA | Depth | Max Load |
|---------------|---------------|----------------|-----------------------|----------|
| MPVW-UNIPPV2U | 37" - 75"+ | Up to 1000x400 | 4.10" Min - 7.05" Max | 150 lb |

INSTALLS IN MINUTES

Direct Unistrut Installation


Easily installs to 1-5/8" unistrut in minutes, just attach to the display and mount to unistrut channel.



ONE TOUCH LOCK SYSTEM

Secure and Release with One Touch


Quick release-and-engage mechanisms lock the mount with one touch and keep the display secure.

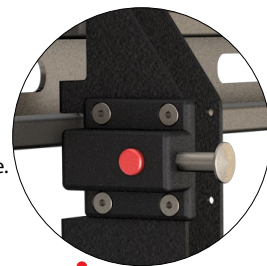

Depth Adjustment

3" Depth Micro-Adjustment


In addition to the 4-corner plumb adds an independent micro-adjustment for regulating depth of the display relative to the wall.



WALL BRAKE ALIGNMENT

No Tools Needed


Two hand-adjustable wall brakes allow for quick alignment on uneven walls.



SERVICE MODE

11.25" Extension From Wall

Gives installer 11.25" of clearance for wiring and service.




- 1) Depth 3"
- 2) Plumb +/-0.5"
- 3) Leveling +/-0.5"

ADJUSTMENTS IN ONE LOCATION


6 Conveniently Located Adjustment Points

All 6 micro-adjustment points are located on the bottom of the mount for easy access. 6mm standard hex driver is included.



MPVW-UNIPPV2U Unistrut Video Wall Mount

For Video Wall Displays up to 1000 x 400 VESA

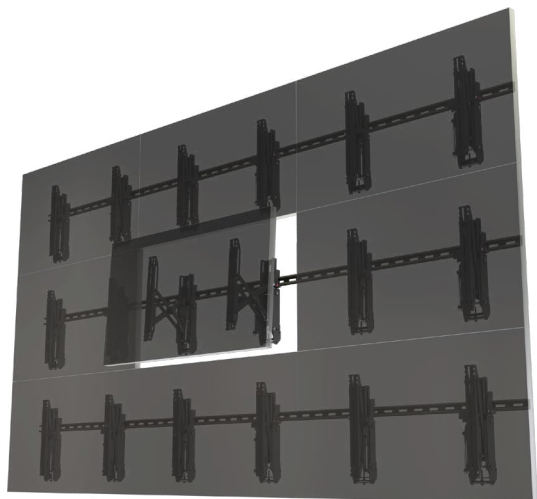

Designed for ease of use and installation, the unistrut video wall mount makes installing video wall systems quick and simple. Mounting directly to unistrut channels in minutes, even large configurations can be quickly assembled by a single installer. Alignment is made easy with 8 different adjustment points, and no tools are required for wall brake adjustments, ideal in situations involving uneven walls. One touch lock-and-key mechanism keeps the display secure, while the push-in/pop-out technology ensures fast display servicing.

| Attribute | Value |
|----------------------------|---|
| Recommended display size * | 37" -75" or larger |
| Mounting surface | 1-5/8" unistrut channel |
| Orientation | Landscape |
| Weight capacity | 150 lb |
| Max mounting pattern | 1000x402mm |
| VESA mounting patterns | 200x200mm through 1000x400mm |
| Post-installation leveling | +/- 0.5" (1" total) |
| Plumb Micro-Adjustment | +/- 0.5" (1" total) |
| Depth Micro-Adjustment | 2.95" total depth |
| Depth from wall | Min 4.10" Max 7.05" |
| Extension | 11.25" extension from wall during service |
| Security | Patent-pending one-touch lock system |
| Construction | High-grade cold rolled steel |
| Product finish | Scratch resistant epoxy powder coat |
| Color | Black |
| Model number | MPVW-UNIPPV2U |
| Warranty | 5 year limited |

